


LEDY N

IP67 | 5W - 10W - 15W | 6.000°K | 30.000h

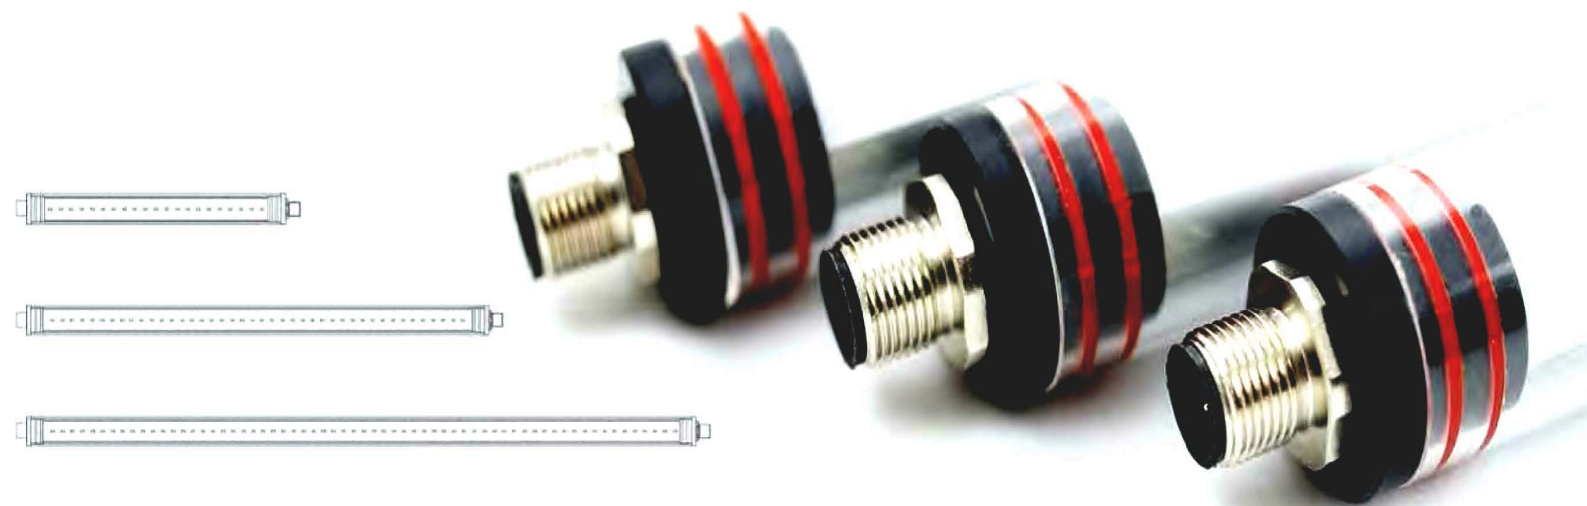

IP67

5W - 700Lm

10w - 1400Lm

15w - 2000Lm

6.000°K - 30.000h

RoHS RAEE CONFORMITY



Connettore dritto
con cavo 5mt
*Straight Female connector with
power cable*



Connettore a 90°
con cavo 5mt
*90° Female connector with
power cable 5mt*



Valvola GORE
sul tappo di chiusura
GORE valv



Connettore M12
a 4-poli
*M12 connector
at 4-pin*

CARATTERISTICHE

Fino all'85% di risparmio energetico
Basso calore
Zero manutenzione
Struttura in alluminio, copertura anti-riflesso e tubo esterno in acrilico o vetro
Ideale per applicazioni antinfortunistiche su mini-macchine e spazi ristretti
Resistente ai lubro-refrigeranti
Direttive 2006/95/CE, 2004/108/CE e 2006/42/CE come previsto dalla Normativa EN 1387

Standard:

- alimentatore 24V-AC/DC integrato
- tubo esterno in acrilico (vetro in opzione)
- connettore maschio M12 a 4 poli
- 1 coppia di clip di fissaggio
- Valvola Gore

ATTENZIONE:

bisogna sempre ordinare i connettori Femmina con cavo a scelta tra:

- **Connettore femmina Dritto** con cavo da 5 mt.
- **Connettore femmina a 90°** con cavo da 5 mt.

FEATURES

*Up to 85% energy saving
Low performing heat
Zero maintenance
Aluminium structure
Ideal for health and safety applications, for small machines and in tight spaces
Resistant to coolants and lubricants
Complies with Directives 2006/95/EC, 2004/108/EC and 2006/42/EC as required by Normative EN 1387*

Standard:

- **24V-DC** built-in LED driver
- *outer tube in acrylic (glass in option)*
- *M12 male connector at 4-pin*
- *1 couple of fixing clips*
- *Gore valve*


ATTENTION:

Always remember to order the female connectors of your choice between:

- **Straight female connector** with 5mt power cable
- **90° female connector** with 5mt power cable

LEDY N 24V-AC/DC - 5W - 10W - 15W - IP67

5W - 700Lm con connettore maschio
5W - 700Lm - with male connector

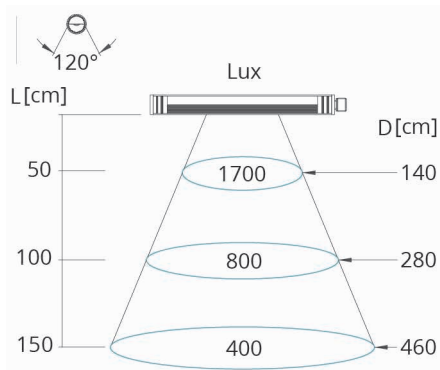

ART.	CODE	VIN	WxLed	cable.mt	Kg
------	------	-----	-------	----------	----


Con tubo in acrilico
With acrylic tube

LEDY N-5WA-24V-AC/DC	07.07.2.12.05.3	24VAC/DC	5W	*	0,16
----------------------	-----------------	----------	----	---	------


Con tubo in vetro
With glass tube

LEDY N-5WG-24V-AC/DC	07.08.2.12.05.3	24VAC/DC	5W	*	0,21
----------------------	-----------------	----------	----	---	------

**Connettore femmina a scelta tra: guarda fondo pagina*
**Female connectors at choice: see below*

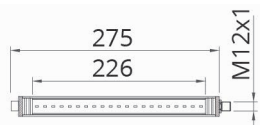

10W - 1400Lm con connettore maschio
10W - 1400Lm - with male connector

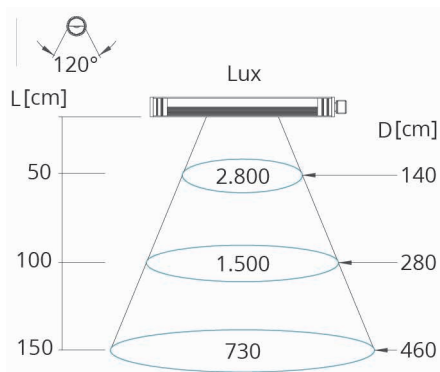

ART.	CODE	VIN	WxLed	cable.mt	Kg
------	------	-----	-------	----------	----


Con tubo in acrilico
With acrylic tube

LEDY N-10WA-24V-AC/DC	07.09.2.12.10.3	24VAC/DC	10W	*	0,27
-----------------------	-----------------	----------	-----	---	------


Con tubo in vetro
With glass tube

LEDY N-10WG-24V-AC/DC	07.10.2.12.10.3	24VAC/DC	10W	*	0,37
-----------------------	-----------------	----------	-----	---	------

**Connettore femmina a scelta tra: guarda fondo pagina*
**Female connectors at choice: see below*

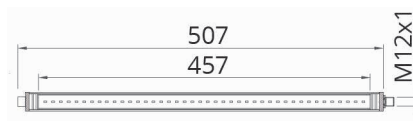

15W - 2000Lm con connettore maschio
15W - 2000Lm - with male connector

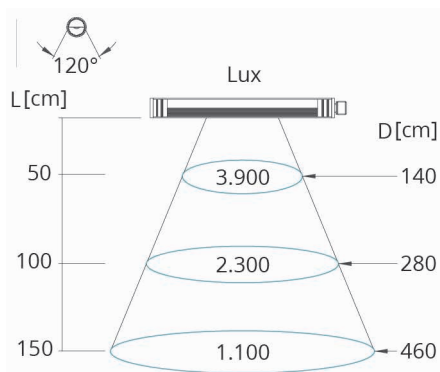

ART.	CODE	VIN	WxLed	cable.mt	Kg
------	------	-----	-------	----------	----


Con tubo in acrilico
With acrylic tube

LEDY N-15WA-24V-AC/DC	07.11.2.12.15.3	24VAC/DC	15W	*	0,38
-----------------------	-----------------	----------	-----	---	------

Con tubo in vetro
With glass tube

LEDY N-15WG-24V-AC/DC	07.12.2.12.15.3	24VAC/DC	15W	*	0,52
-----------------------	-----------------	----------	-----	---	------

**Connettore femmina a scelta tra: guarda fondo pagina*
**Female connectors at choice: see below*

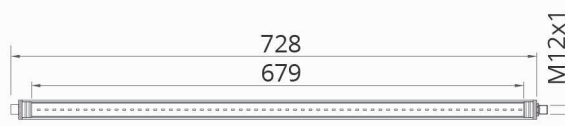

RICAMBI STANDARD E OPTIONAL
STANDARD AND OPTIONAL SPARE PARTS

*CONNETTORE FEMMINA
*FEMALE CONNECTORS


SCATOLA MADRE
MASTER BOX

FIXING CLIPS
(Nr.1 = 2 PCS)




ART CODE	CLIP01 07.11.003.3
----------	-----------------------

STRAIGHT CONNECTOR
WITH CABLE 5MT



ART CODE	C12F4-00+CAB5 00.09.004.1
----------	------------------------------

90° CONNECTOR
WITH CABLE 5MT



ART CODE	C12F4-90+CAB5 00.09.003.1
----------	------------------------------



Qty: 6 pcs
Dimensions (5W):
13x13x55 cm
Dimensions (10W):
13x13x75 cm
Dimensions (15W):
13x13x100 cm
Weight: 5/8 Kg